

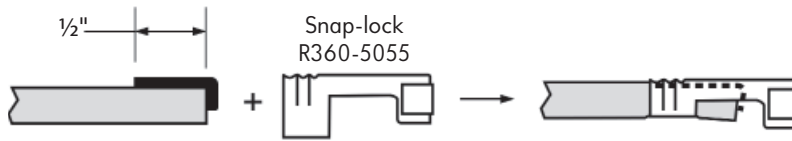



"H" AND "W" TYPE BOOT AND SNAP-LOCK REPLACEMENT INSTRUCTIONS




1. Strip 1/2" insulation off wire
2. Bend wire back as shown above
3. Crimp snap-lock on insulation
4. Insert snap-lock into boot as shown



"N" TYPE BOOT AND SNAP-LOCK REPLACEMENT INSTRUCTIONS

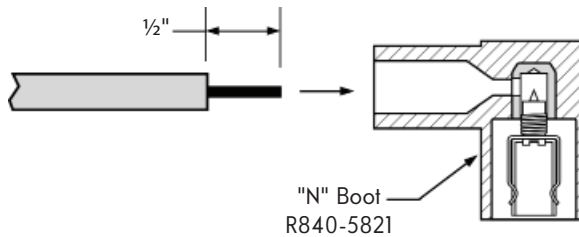


1. Strip 1/2" insulation off wire
2. Insert wire into boot as shown above
3. Secure clip with slotted screwdriver (clockwise to tighten)



"C" TYPE 1/4" Ø SNAP-LOCK IGNITION TRANSFORMER CLIP REPLACEMENT INSTRUCTIONS

1. Strip 5/8" insulation off wire
2. Bend wire back 1/2" as shown
3. Crimp snap-lock clip on insulation, as shown
4. Heat shrink plastic sleeve over clip and wire

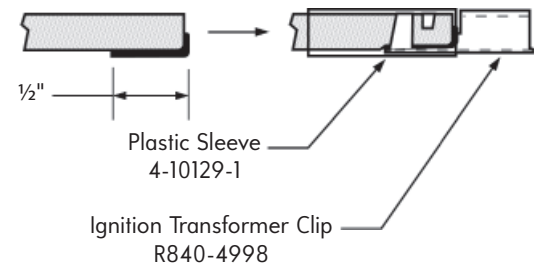

WARNING: Situations dangerous to personnel and property may exist with the operation and maintenance of any combustion equipment. The presence of fuels, oxidants, hot and cold combustion products, hot surfaces, electrical power in control and ignition circuits, etc., are inherent with any combustion application. Components in combustion systems may exceed 160°F (71°C) surface temperatures and present hot surface contact hazard. Fives North American Combustion, Inc. suggests the use of combustion systems that are in compliance with all Safety Codes, Standards, Regulations and Directives; and care in operation.

CONTACT

fna.sales@fivesgroup.com

T +1 800 626 3477 - F +1 216 373 4237

Fives North American Combustion, Inc.
4455 East 71st Street - Cleveland, OH 44105 - USA
www.fivesgroup.com



fives
Industry can do it